

## DS-3T0310HP-E/HS 8-Port 100M Unmanaged Hi-PoE Switch



DS-3T0310HP-E/HS switches are layer 2 Hi-PoE switches, providing advanced PoE power supply technology and wider temperature (-30 to 65 °C) design on the basis of high-performance access to ensure stable data upload. The switches support Hi-PoE, long range, port isolation, and PoE watchdog function.

- 6 × 100M PoE ports, 2 × Hi-PoE port, 1 × gigabit RJ45 port and 1 × gigabit SFP fiber optical port.
- IEEE 802.3at/af/bt standard for Hi-PoE ports (Max. 90 W PoE output).
- IEEE 802.3at/af standard for PoE ports (Max. 30 W PoE output).
- IEEE 802.3, IEEE 802.3u, IEEE 802.3x, IEEE 802.3z and IEEE 802.3ab standard.
- 6 KV surge protection for PoE ports.
- PoE output power management.
- Up to 300 m long-range transmission.
- PoE watchdog to auto detect and restart the cameras that do not respond.
- Port isolation to improve network security.
- Wider temperature (-30 to 65 °C) access design.
- Wire-speed forwarding.
- Store-and-forward switching.
- Solid high-strength metal shell.
- Reliable fan-free design.

## ▪ Specification

Model		DS-3T0310HP-E/HS
<b>Network Parameters</b>	Ports	6 × 10/100 Mbps PoE ports, 2 × Hi-PoE ports, 1 × Gigabit RJ45 port, and 1 × Gigabit fiber optical port
	Port Type	RJ45 port, full duplex, MDI/MDI-X adaptive
	Working Mode	Standard mode (default), Extend mode, Isolation mode, PoE watchdog mode
	Standard	IEEE 802.3, IEEE 802.3u, IEEE 802.3x, IEEE 802.3z and IEEE 802.3ab
	Forwarding Mode	Store-and-forward switching
	MAC Address Table	4 K
	Switching Capacity	5.6 Gbps
	Packet Forwarding Rate	4.1664 Mpps
	Internal Cache	1.5 Mbits
	Ports for Long-Distance Transmission	Ports 7 and 8
<b>PoE Power Supply</b>	PoE Standard	Ports 1 and 2: IEEE 802.3af, IEEE 802.3at, IEEE 802.3bt Ports 3 to 8: IEEE 802.3af, IEEE 802.3at
	PoE Power Pin	End-span: 1/2(-), 3/6(+) Mid-span: 4/5(+), 7/8(-) 8-pin power: 1/2(-), 3/6(+), 4/5(+), 7/8(-)
	PoE Port	Ports 1 to 8
	Max. Port Power	Ports 1 and 2: 90 W Ports 3 to 8: 30 W
	PoE Power Budget	110 W
<b>Dialing Function</b>	Long Range	Ports 7 and 8: up to 300 m.
	Port Isolation	Ports 1 to 8: port isolation mode to improve network security.
	PoE Watchdog	Ports 1 to 8: auto detect and restart the cameras that do not respond.
<b>General</b>	Dimensions (W × H × D)	197 mm × 114.2 mm × 42.2 mm (7.76" × 4.50" × 1.66")
	Shell	Metal material, fan-free design
	Gross Weight	1.24 kg (2.73 lb)
	Net Weight	0.565 kg (1.25 lb)
	Operating Temperature	-30 °C to 65 °C (-22 °F to 149°F)
	Operating Humidity	5% to 95% (no condensation)
	Storage Temperature	-40 °C to 85 °C (-40 °F to 185 °F)
	Storage Humidity	5% to 95% (no condensation)
	Power Supply	48 to 57 VDC, 2.5 A Max.
	Power Consumption in Idle	< 10 W
Max. Power Consumption	120 W	
<b>Approval</b>	EMC	FCC (47 CFR Part 15, Subpart B); CE-EMC (EN 55032: 2015, EN 61000-3-2: 2014, EN 61000-3-3: 2013, EN 55024: 2010 +A1: 2015); RCM (AS/NZS CISPR 32: 2015); IC (ICES-003: Issue 6, 2016)
	Safety	UL (UL 60950-1); CB (IEC 60950-1:2005 + Am 1:2009 + Am 2:2013); CE-LVD (EN 60950-1:2005 + Am 1:2009 + Am 2:2013)


Chemistry	CE-RoHS (2011/65/EU); WEEE (2012/19/EU); Reach (Regulation (EC) No 1907/2006)
-----------	---

## Typical Application


### 8-Port 10/100M PoE

10/100M Unmanaged PoE

Pro-Series

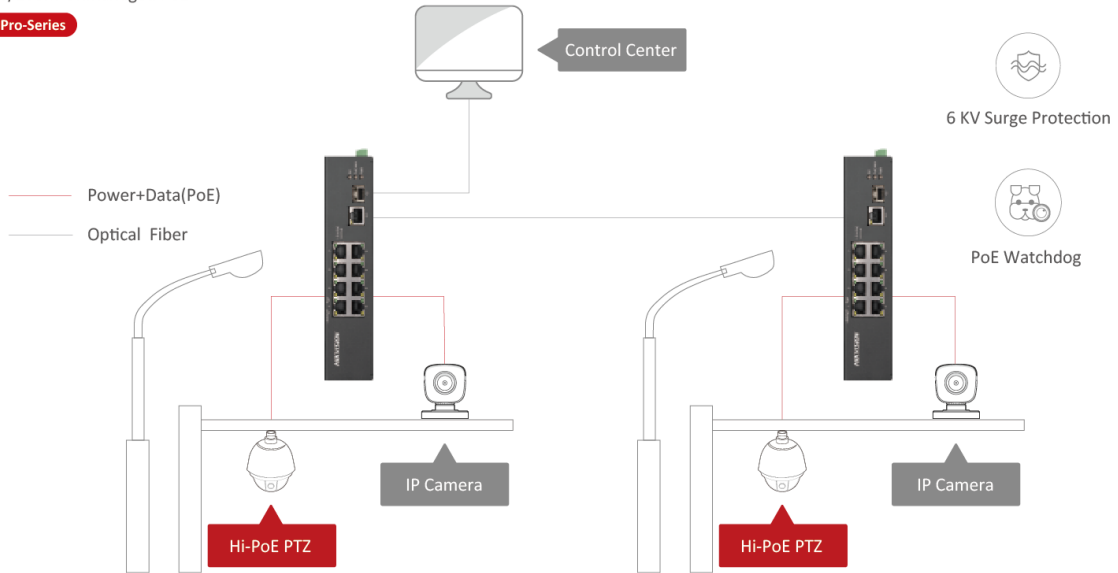


## Physical Interface

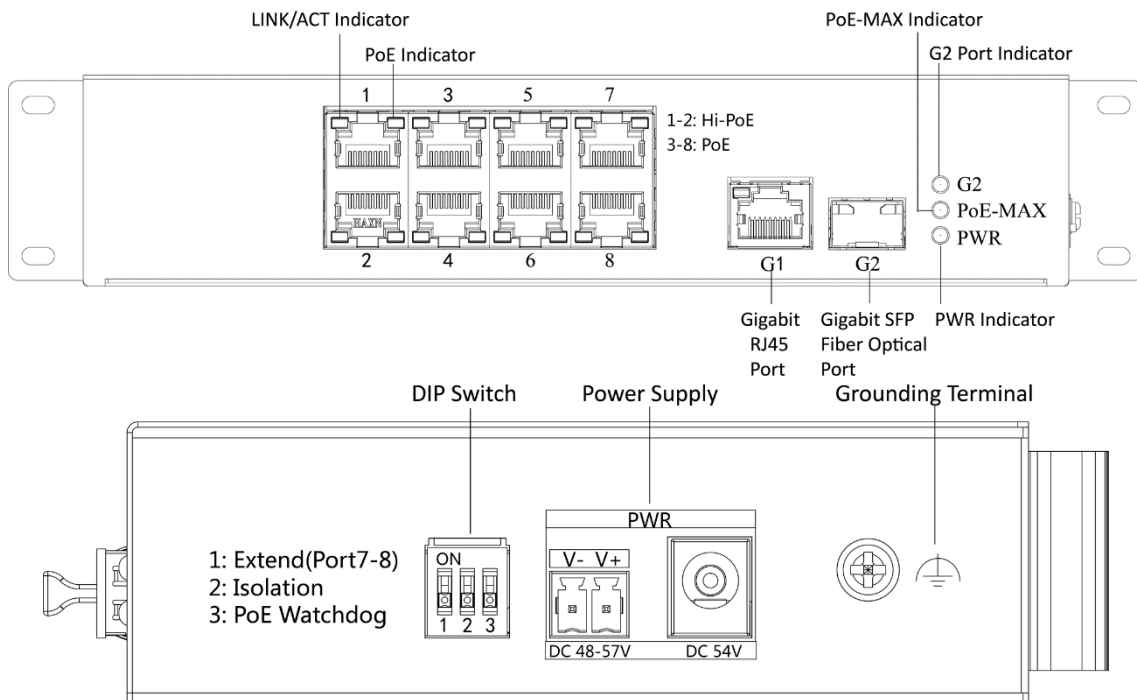

▪ **Available Model**

DS-3T0310HP-E/HS

▪ **Dimension**

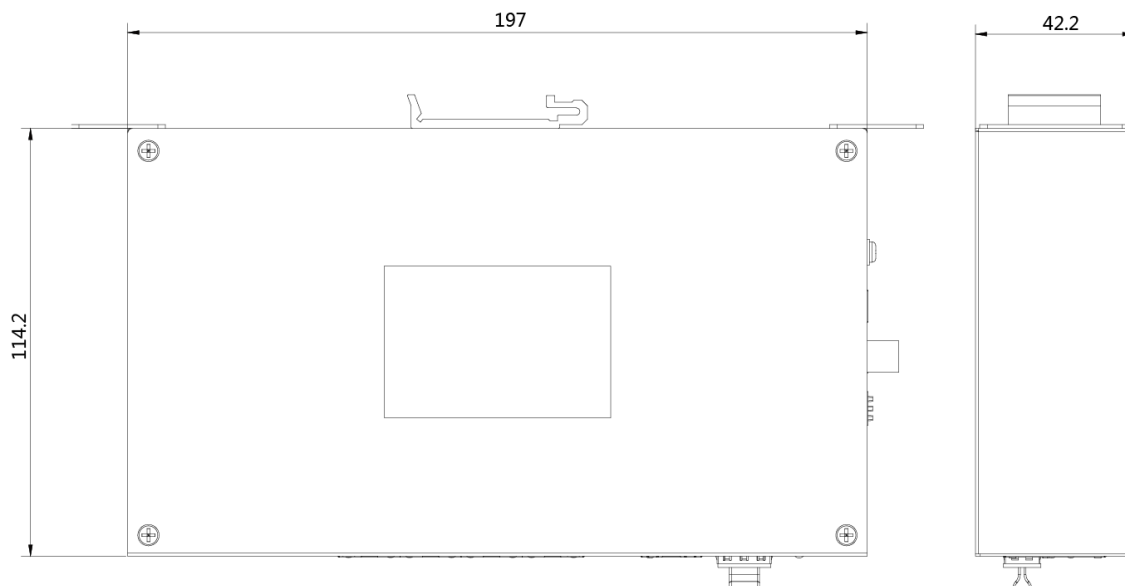

▪ **Accessory**

▪ **Optional**

HK-SFP-1.25G-1310-DF-MM	HK-SFP-1.25G-20-1310-DF	HK-SFP-1.25G-20-1310	ELG-150-48A	HK-SFP-1.25G-20-1550

**Headquarters**

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
www.hikvision.com



Follow us on social media to get the latest product and solution information.

